


Y-STRAINER



WRS Y-strainers are specially designed for chemical dosing usage. It comes with various choice of materials for different applications. Standard material shall be UPVC. User may select optional material such as CPVC, PVDF or SS304 depending on their transfer liquid. Generally, it is installed in front of a metering pump or valve to filter out solids in the liquid. It may be a small little piece of accessory, but it helps tremendously on increasing the lifespan of a dosing pump or valves.

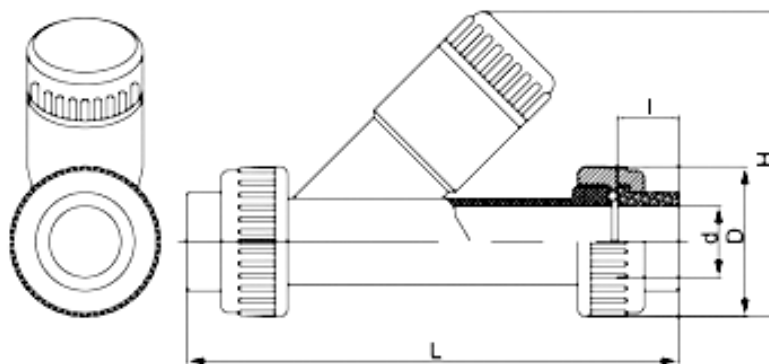

Model	Size	L	d	D	I	H
28615	DN15	190	20	52.6	22	106
28620	DN20	183	25	52.6	19	106
28625	DN25	199	32	60.8	21	124.4
28632	DN32	258	40	83.5	34	173
28640	DN40	258	50	83.5	31	173
28650	DN50	292.6	63	104	40	204
28665	DN65	420	75	122	41	251
28680	DN80	430	90	155	50	260

Materials: UPVC, CPVC, PVDF, SS304, SS316, PPH

Filter Size: 10 mesh, 20 mesh, 40 mesh